


It may be an advantage to use a wooden moulding when attaching the wall angle in order to absorb possible unevennesses of the wall.

### SECTION A-A

- 1 Shadowline moulding 4140017 or 4140018, attached to wall at 300 mm. with screw with pan head.
- 2 Main T section 4120180 (15 mm) or 4110180 (24 mm), cc distance 1200 mm.
- 3 Cross T section 4120163 (15 mm) or 4110163 (24 mm), length 1200 mm, cc distance 600 mm.
- 4 Adjustable hanger, cc distance 1200 mm.
- 5 Gyptone 10 mm plasterboard with edge A. (perforated / ikke perforated).
- 6 Adjusted cross T section.
- 7 Cross T section 4120161 (15 mm) or 4110161 (24 mm), length 600 mm, cc distance 1200 mm.

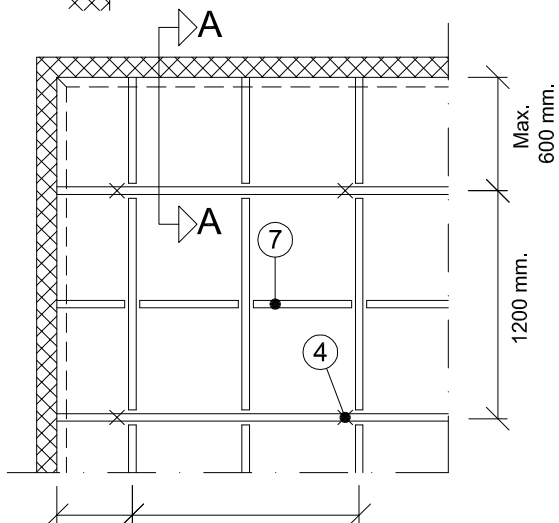

Hanger max. 400 mm. Hanger max. 1200 mm.

### PLAN CUTOUT

### STANDARD DETAIL

System Edge A ceiling

Notation Wall attachment with shadowline moulding, max. frieze width 600 mm.

Scale 1:2

Date 25/07-2012

Rev.

Rev. date

Nr.

A-002-10mm

**GYPTONE**