

SECTION A-A

- 1 Light fixture with it's own hangers.
- 2 24 mm main beam Cross-Lock Unipro, with c/c distance 1200 mm.
- 3 24 mm cross profile Cross-Lock Unipro, c/c distance 600 mm.
- 4 Adjustable hanger as close to the light fixture as possible.
- 5 Cross Lock Connector, c/c distance 600 mm.
- 6 Bracket for connection between light fixing and grid system.
- 7 12,5 mm Gyptone tiles with edge D2 (perforated / non perforated).
- 8 Connecting bracket for connection between wall and grid system, one on each side of light fixture.

### STANDARD DETAIL

System Gyptone edge D2 ceiling


Notation Light fixture in a line with Gyptone edge D2

Scale 1:2 Date 16/04-2015 Rev. Rev. date



Nr. D2-003

### PLAN CUTOUT

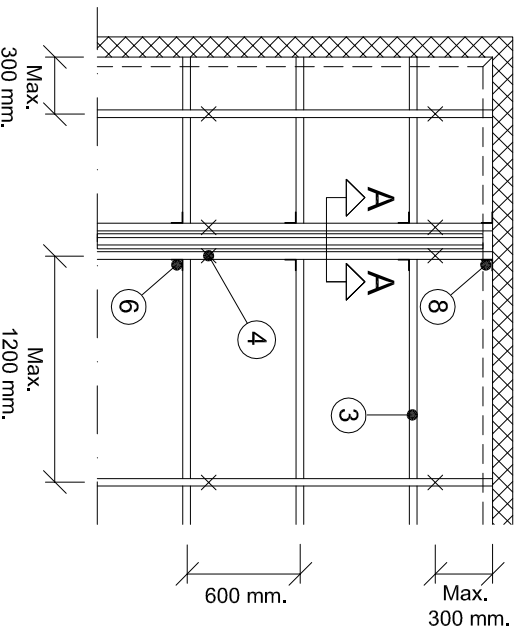

PLAN CUTOUT