


SECTION A-A

Note that hook must be folded after installation.

- 1 600 mm T-24 cross tee.
- 2 24 mm main beam (Cross-Lock Unipro) 4118181, with cc distance 1200 mm.
- 3 24 mm Cross profile (Cross-Lock Unipro) 4118181, cc distance 300 mm.
- 4 Adjustable hanger with cc distance 1200 mm.
- 5 Cross-Lock connector 4207005, cc distance 300 mm.
- 6 10 mm Gyptone Xtransiv plasterboard with edge E15/B (perforated / not perforated).
- 7 Connecting bracket for supporting the grid between cross tee and cross profile..
- 8 Screw P14 for connecting bracket.

For more information, look into installation manual for Gyptone Xtransiv

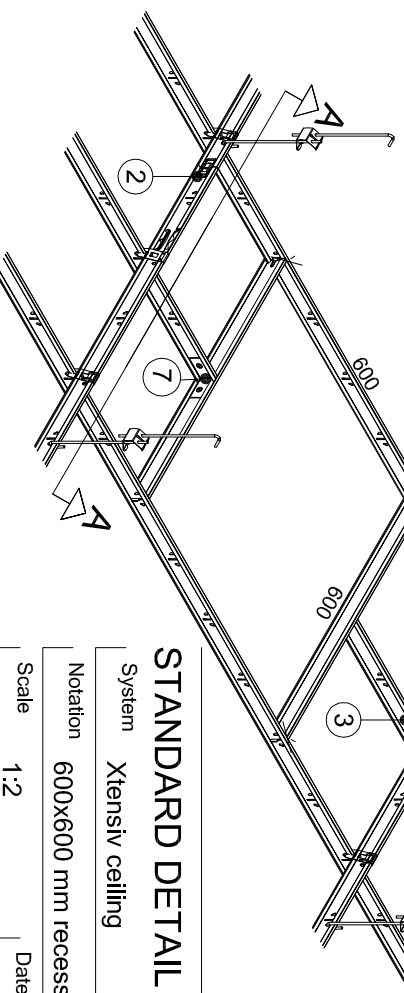

PLAN CUTOUT

STANDARD DETAIL

System Xtransiv ceiling

Notation 6000x600 mm recess for light and ventilation i Xtransiv ceiling

Scale	1:2	Date	24/09-2014	Rev.		Rev. date		Nr.	X-004
-------	-----	------	------------	------	--	-----------	--	-----	-------

